



Graphite line Filters Top & Side Mount





Designed to cater for all residential applications from small above ground pools, through to larger in ground domestic installations.

GRAPHITE LINE FILTERS

Crystal, clear, sparkling water is the most important aspect of any swimming pool. A filter is by far the most efficient way to ensure perfect water quality. Certikin filters can be used with standard Certikin 16/30 grade silica sand. Designed to be used on a variety of pools, from above ground to in ground domestic applications.

Features

- 2.5 BAR
- Manufactured from the highest-grade materials
- Hi gloss non-corrosive FRP tank and base components
- Energy efficient collection and distribution pipe-work
- Speed style installation and service connections
- Easy access drain tap

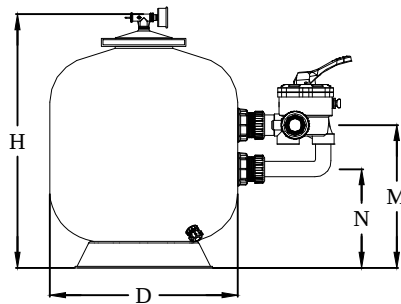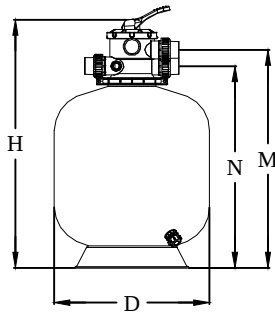

Large Cover Lid
for 1000 & 1200mm



Unions to suit
DIN / ASTM Pipes

Graphite line Top Mount Filter



Specifications								
CODE	Ømm (D)	Conns	Flow (m³/hr)	Working Pressure (BAR)	Sand (Kg)	H (mm)	M (mm)	N (mm)
BT400	400	1.5"	6	2.5	45	770	629	570
BT500	500	1.5"	9	2.5	85	860	719	660
BT650	650	1.5"	15	2.5	150	960	819	760
BT700	700	1.5"	17	2.5	200	1030	889	830
KBT800	800	2"	24	2.5	260	1130	972	892
KBT900	900	2"	26	2.5	400	1270	1112	1032
KBT1000	1000	2"	32	2.5	600	1340	1182	1102
KBT1200	1200	2"	40	2.5	900	1540	1392	1312

Graphite line Side Mount Filter



Specifications								
CODE	Ømm (D)	Conns	Flow (m³/hr)	Working Pressure (BAR)	Sand (Kg)	H (mm)	M (mm)	N (mm)
BS450	450	1.5"	8	2.5	45	665	375	250
BS500	500	1.5"	9	2.5	85	710	405	280
BS650	650	1.5"	15	2.5	150	810	435	310
BS700	700	1.5"	17	2.5	200	880	485	360
BR800	800	2"	24	2.5	260	1010	680	385
BR900	900	2"	26	2.5	400	1100	725	430
BR1000	1000	2.5"	32	2.5	600	1190	755	460
BR1200	1200	2.5"	40	2.5	920	1380	945	650

If you require further technical information please do not hesitate to contact us

This literature is intended as a guide. The Company reserves the right to change the specifications without notice. 13.08.2019

Certikin